


RFM products are now Murata products.

SF2134E

897.50 MHz **SAW Filter**



Low-loss UHF SAW Filter

- Surface Mount 3.0 x 3.0 mm Package
- Complies with Directive 2002/95/EC (RoHS)



Absolute Maximum Ratings

Rating	Value	Units
Input Power Level	5	dBm
DC Voltage on any Non-ground Terminal	3	V
Operating Temperature Range	-20 to +75	°C
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s	

Flectrical Characteristics

Characteristic	Sym	Notes	Min	Тур	Max	Units
Center Frequency	f _C			897.5		MHz
Insertion Loss, 880 to 915 MHz	IL			2.1	3.0	dB
Amplitude Ripple, 880 to 915 MHz				1.0	2.0	dB _{P-P}
Attenuation Referenced to 0 dB						
DC to 860 MHz			17	19		
925 to 935 MHz			5	12.4		dB
935 to 960 MHz			20	24		
980 to 2000 MHz			20	22		
VSWR, 880 to 915 MHz				2:1	2.6:1	
Source Impedance	Z _S			50		Ω
Load Impedance	Z _L			50		Ω

Case Style	SM3030-6 3.0 x 3.0 mm Nominal Footprint	
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	674, YWWS	
Standard Reel Quantity Reel Size 7 Inch	500 Pieces/Reel	
Reel Size 13 Inch	3000 Pieces/Reel	

Electrical Connections

Connection	Terminals
Input	2
Output	5
Case Ground	All others




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


NOTES:

- Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
- Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
 Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
- "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes." The design, manufacturing process, and specifications of this filter are subject to change.
- Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
- US and international patents may apply.

 Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.


Filter Amplitude Response

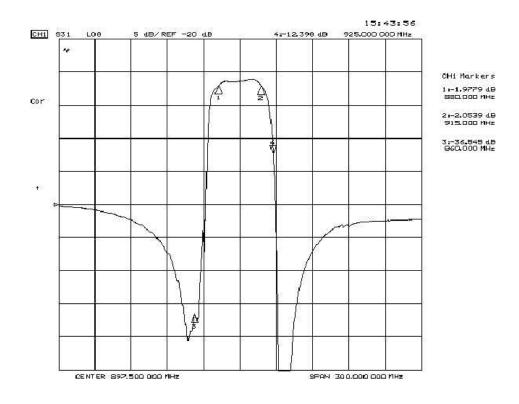


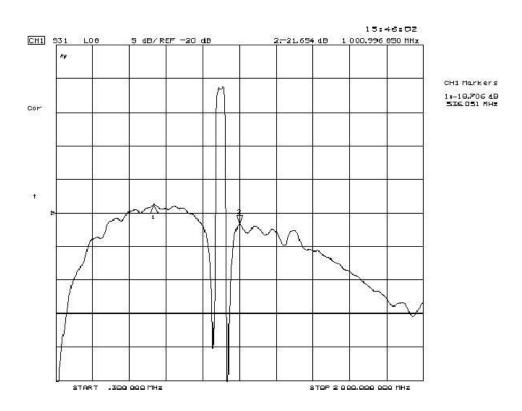


Filter Input and Output Impedance


S11

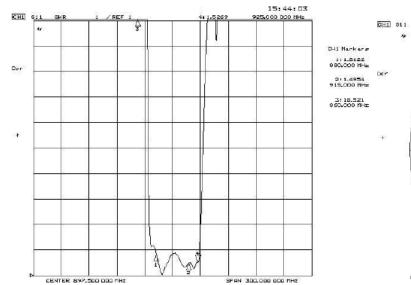



S22



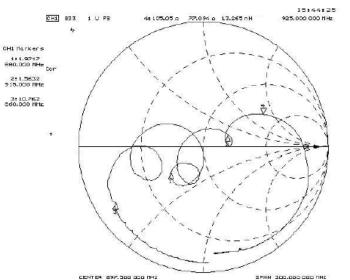

CHI Markers

1: 29.904 n 9.6749 n 990.000 MHz

2:53.600 n -20.672 n 9:5:000 MHz


CHI Markerk


11 27,492 D -12,297 D 660,000 MHz

X: 5.0069 0: -19.315 0: 960.000 MHz

SM3030-6 Case

6-Terminal Ceramic Surface-Mount Case 3.0 X 3.0 mm Nominal Footprint





PCB Footprint Top View

Case and PCB Footprint Dimensions


Dimension		mm			Inches	
Dimension	Min	Nom	Max	Min	Nom	Max
Α	2.87	3.00	3.13	0.113	0.118	0.123
В	2.87	3.00	3.13	0.113	0.118	0.123
С	1.12	1.25	1.38	0.044	0.049	0.054
D	0.77	0.90	1.03	0.030	0.035	0.040
E	2.67	2.80	2.93	0.105	0.110	0.115
F	1.47	1.60	1.73	0.058	0.063	0.068
G	0.72	0.85	0.98	0.028	0.033	0.038
Н	1.37	1.50	1.63	0.054	0.059	0.064
I	0.47	0.60	0.73	0.019	0.024	0.029
J	1.17	1.30	1.43	0.046	0.051	0.056
K		3.20			0.126	
L		1.70			0.067	
М		1.05			0.041	
N		0.81			0.032	
0		0.38			0.015	


Case Materials

– D →


Materials				
Solder Pad Plating	0.3 to 1.0 μm Gold over 1.27 to 8.89 μm Nickel			
Lid Plating	2.0 to 3.0 µm Nickel			
Body	Al ₂ O ₃ Ceramic			
Pb Free				

Top View







Bottom View



Tape and Reel Specifications

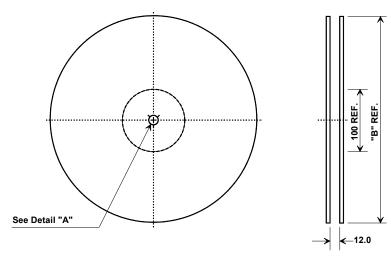

"B"		Quantity Per Reel	
Inches	millimeters	quality i or itool	
7	178	500	
13	330	3000	



COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions				
Ao	3.35 mm			
Во	3.35 mm			
Ko	1.40 mm			
Pitch	8.0 mm			
W	12.0 mm			

