


**NOTES:**

1. SUGGESTED MOUNTING HOLE: Ø.218 [Ø5.54]
2. HARDWARE IS INCLUDED.

LEAD FINISH	SOLDER
BUSHING FINISH	SILVER
CAPACITANCE	.3uF +100/-0%
TEMP. RANGE	-55°C TO +125°C
CURRENT	10 AMPS MAX.
WORKING VOLTAGE	85°C 80 VDC MAX. 125°C 50 VDC MAX.
DC RESISTANCE	.01 Ohms MAX.

I.L. PER MIL-STD-220 @ 25°C (NO LOAD)	
FREQ.	I.L. (dB)
50 KHz	8
100 KHz	13
1 MHz	32
10 MHz	47
100 MHz	60
500 MHz	70
1 GHz	70

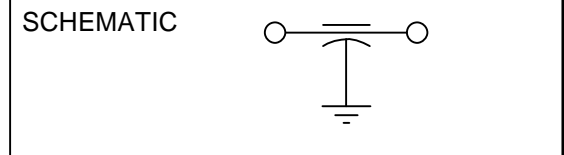

**MARKING:**

PART: SCI 304P  
 BAG: 54-786-013  
 DATE CODE  
 QTY / BAG (200 MAX.)

CN 46964-ENG	44	CHANGE NOTICE	REV. NO.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MILLIMETERS]	TOLERANCES UNLESS OTHERWISE SPECIFIED Dec. .x ± Dec. .xx ± Dec. .xxx ± .015 [.38] Angles ± 0° 30"	SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA
CN 184932	43						
DO NOT SCALE THIRD ANGLE PROJECTION							
				©		Sheet 1 of 1	54-786-013