


LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	5500pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	3 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	0.1ohms MAX.

MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHZ	I.L. (db)
3	7
10	14
30	40
100	60
300	70
1 GHz	70

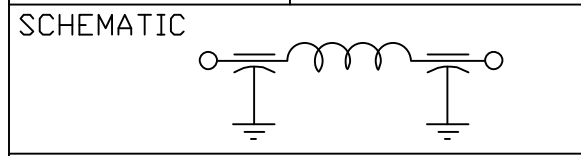


MARKING:

PART: SF729305


BAG:
51F-729-305
DATE CODE
QTY./BAG (50 MAX.)

NOTES:

1. MAX. MOUNTING TORQ. = 1.5lb-in.
2. HARDWARE IS INCLUDED.
3. MAX. REFLOW IS 245°C FOR 5 SECONDS.
4. THIS IS A LEAD FREE PRODUCT.

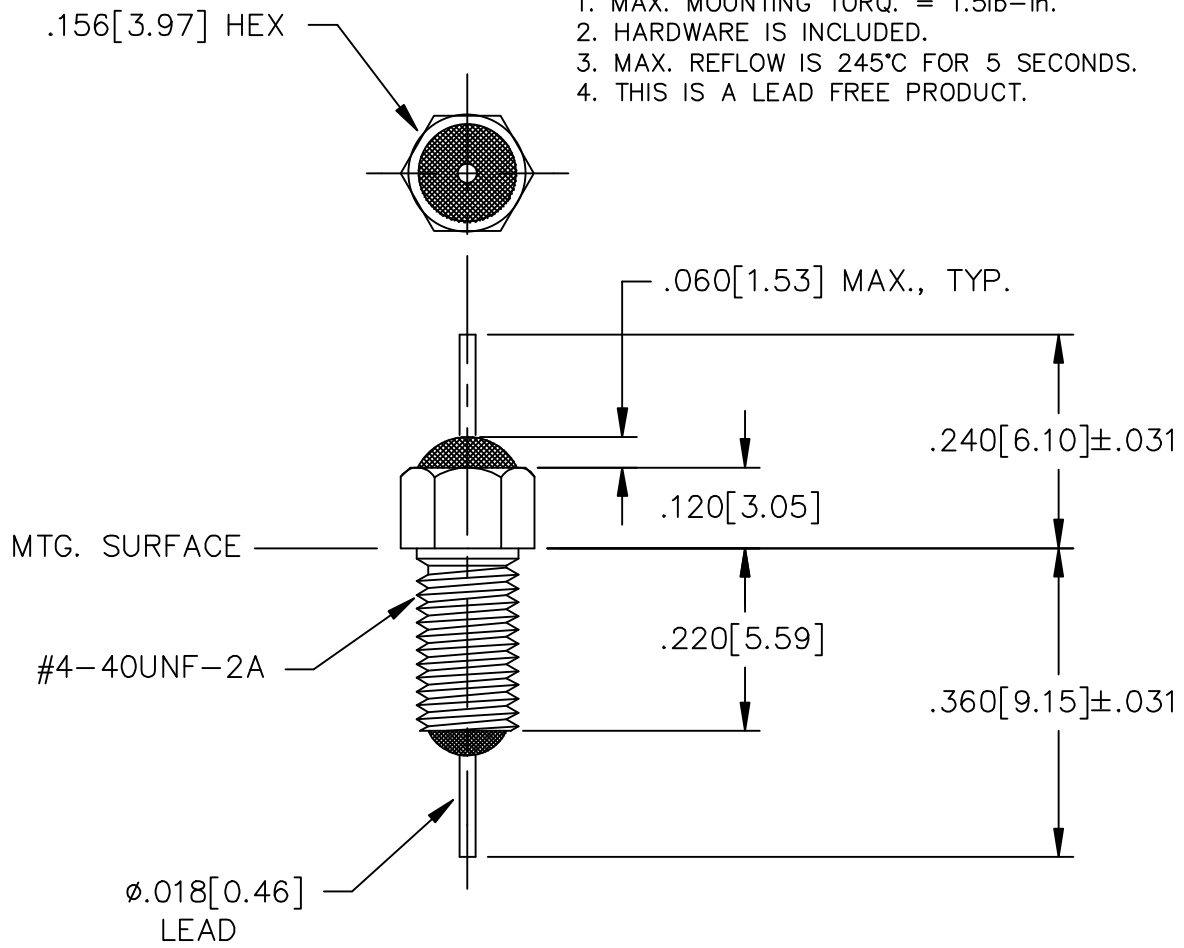

					00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
					CN 30515-CPD	CHANGE NOTICE	Fractions ± 1/64
							Dec. .xx±
							Dec. .xxx±.005
							Angles ±0° 30'
							CODE IDENT. NO. 0LSP2



ERIE, FAIRVIEW PENNSYLVANIA

SPECTRUM CONTROL INC.

Dwn. KAUFFMAN Description Pi

DATE 10/02/06 RESIN SEAL FILTER

ENGR. D. REILLY

Scale NONE

51F-729-305